


Genus Paper and Board Limited Assured RCT Liner & Fluting Medium is a multi-ply sheet made with recycled fibers for high strength, lightweight corrugated applications. It is designated to provide the assured crush resistance for application as both liner and medium and is manufactured at our Moradabad Unit.

STANDARD SPECIFICATION: Assured HRCT LINER & FLUTING MEDIUM

Conditioned Basis Weight (GSM)	120 GSM	140 GSM	150 GSM	170 GSM	180 GSM
Nominal	120	140	150	170	180
Lower Guide	114	133	143	162	171
Upper Guide	126	147	157	178	189
<i>Assured HRCT Liner & Fluting Medium (Assured RCT-CD, kN/m)</i>					
Ring Crush Test - Cross Direction	1.1	1.4	1.7	2.1	2.2
Moisture Content, %					
Average Range(+/-)	7 1.5	7 1.5	7 1.5	7 1.5	7 1.5
Cobb-60 Seconds					
Target Range (±)	40 10	40 10	40 10	40 10	40 10

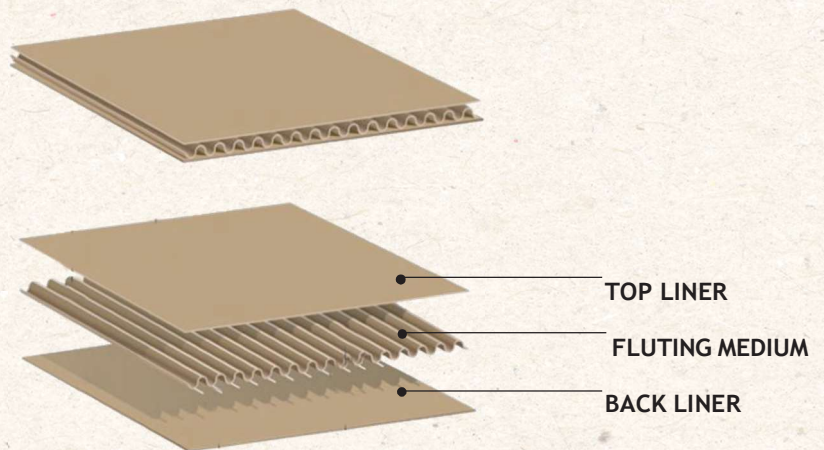

Notes:

- GSM is as per Tappi T410 & IS 1397
- Per TAPPI Standard conditions at $50 \pm 2\%$ relative humidity, and $23 \pm 1^\circ\text{C}$ temperature
- RCT values are as per L & W tester; RCT is as per Tappi T822
- Results per reel average in standard condition, except for Basis Weight and Moisture
- This supersedes all previous version

SSV: U1/ 22/ 2.1